




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04Q 7/32, 7/22	A1	(11) International Publication Number: WO 95/29568 (43) International Publication Date: 2 November 1995 (02.11.95)
(21) International Application Number: PCT/US95/03410 (22) International Filing Date: 21 March 1995 (21.03.95) (30) Priority Data: 231,000 20 April 1994 (20.04.94) US (71) Applicant: ERICSSON INC. [US/US]; 1 Triangle Drive, Research Triangle Park, NC 27709 (US). (72) Inventor: HENRY, Raymond, C., Jr.; 10 Trescott Drive, Durham, NC 27703 (US). (74) Agent: NIXON, Larry, S.; Nixon & Vanderhye PC, 8th floor, 1100 North Glebe Road, Arlington, VA 22201-4714 (US).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report.</i>

(54) Title: METHOD AND APPARATUS FOR EXTENDING BATTERY LIFE IN A DIGITAL CELLULAR COMMUNICATIONS SYSTEM

(57) Abstract

A method and apparatus is provided for extending the battery life of a cellular radiotelephone. A cellular radiotelephone is conditioned to operate in a pager-only mode wherein the radiotelephone may receive short messages from a base station while conserving battery life by cyclically adopting a deep-sleep state. The base station is notified by the radiotelephone before the radiotelephone enters the deep-sleep state that the radiotelephone is unable to receive messages. After a period of time, the radiotelephone wakes-up, re-establishes contact with the base station and notifies the base station that the radiotelephone is ready to receive messages. After receipt of any messages the radiotelephone repeats the process.

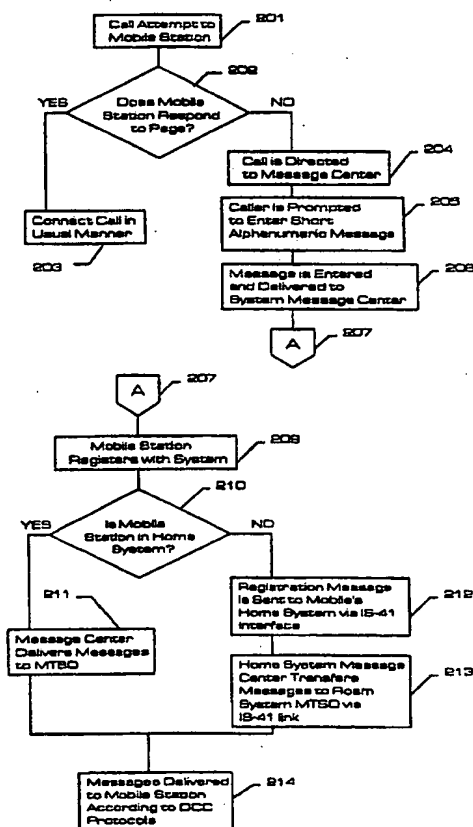

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD AND APPARATUS FOR EXTENDING BATTERY LIFE IN A
DIGITAL CELLULAR COMMUNICATIONS SYSTEM

FIELD OF THE INVENTION

The present invention relates generally to cellular radio communications and, more specifically, to a method and apparatus for maximizing the battery life of portable cellular radiotelephones used in digital cellular communication systems.

BACKGROUND OF THE INVENTION

Cellular communications systems are well-known. Analog cellular systems such as designated AMPS, ETACS, NMT-450, and NMT-900 have been deployed successfully throughout the world. More recently, digital cellular systems such as designated IS-54B in North America and the pan-European GSM system have been introduced. These systems, and others, are described, for example, in the book titled **Cellular Radio Systems** by Balston, et al., published by Artech House, Norwood, MA., 1993.

The IS-54B specification entitled **Cellular System Dual-Mode Mobile Station Base Station Compatibility Standard** (available from the Telecommunications Industry Association, 2001 Pennsylvania Avenue, N.W., Washington, D.C., 20006) provides increased system capacity through digital time division multiple access (TDMA) while allowing compatibility with existing analog systems. Mobile stations designed to meet the IS-54B specification are able to function with both the new TDMA systems and the existing AMPS analog systems. Throughout this specification the terms mobile station, cellular telephone, cellular phone, mobile phone, and cellular radiotelephone are used interchangeably to refer to the same device. One drawback to the current specification is that the both the digital and analog systems make use of the existing AMPS analog control channels. Therefore TDMA capable mobile stations are constrained

by the old analog protocols and are not able to fully utilize all the features possible with digital communications.

Currently, cellular mobile radiotelephones are limited in stand-by battery life because they must continuously monitor the analog control channel for paging messages indicating an incoming call. Even with high capacity batteries, stand-by times in excess of about 24 hours are rare. This may be contrasted with paging receivers, or "beepers", which have battery lives of about 100-200 hours from a single AA battery achieved by cyclical operation. The need for longer battery life in cellular radiotelephones is therefore self-evident.

A digital control channel (DCC) has recently been proposed to the Telecommunications Industry Association (TIA). The DCC specification is identified as PN 3011-1 and PN 3011-2 and is available from the TIA at the above address. When adopted, the DCC will become part of a new IS-54C specification. The specifications PN 3011-1 and PN 3011-2 are incorporated herein by reference in their entirety.

One feature of the DCC is called short message service (SMS.) With SMS it will be possible to send alphanumeric messages to compatible mobile stations in a manner similar to that presently done with paging receivers. This feature opens the door for many new cellular phone options.

Unlike voice communications in which a caller is waiting for a response from the called-party, alphanumeric messages do not require an immediate response and can be stored and subsequently delivered to the mobile station some period of time after origination. This allows the mobile phone to adopt what will hereinafter be referred to as a "pager-only mode" of operation.

The pager-only mode of the mobile station will allow the user to receive SMS messages but not to receive incoming conversation type calls. The call origination capability remains thereby allowing the user to place calls without exiting the pager-only mode. The pager-only mode offers many advantages to the user not the least of which is the benefit of much longer

battery life. The pager-only mode also functions as a do-not-disturb mode for business meetings, and allows the mobile station user to perform "call screening" of incoming calls. Unlike the known broadcast page receiver (i.e., "beeper"), the mobile phone is immediately available to place a call to the message originator.

SUMMARY OF THE INVENTION

In view of the foregoing background, it is therefore an object of the present invention to provide a method for increasing the battery life of a battery-powered cellular radiotelephone.

It is also an object of the present invention to provide a pager-only mode for a cellular radiotelephone thereby allowing the user of a portable cellular radiotelephone to receive short messages broadcast to it from a cellular base station.

These and other objects, advantages, and features of the present invention are provided a method for saving battery power in a cellular radio communication system having a base station with a base station control signal and a mobile station conditioned to adopt a pager-only mode wherein the mobile station cyclically transmits a first signal to the base station indicating that the mobile station is unable to receive messages from the base station. After transmitting the first signal, the mobile station is further conditioned to deactivate selected circuits within itself for a predetermined period of time and then to automatically reactivate the selected circuits after the predetermined time period has elapsed and to transmit a second signal to the base station indicating that the mobile station is able to receive messages.

In another embodiment, the first and second signals transmitted by the mobile station include power-down and power-up registration messages.

In yet another embodiment, the mobile station is adapted to allow the user to set and reset the pager-only mode.

A further embodiment of the invention comprises a cellular communications system having a mobile station conditioned to transmit a first signal to a base station to notify the base station when the mobile station is unable to receive messages. The mobile station includes a controller to deactivate selected circuits within the mobile station for a period of time and to automatically re-activate the selected circuits after the period of time has expired. The mobile station is further conditioned to transmit a second signal after the period of time has elapsed to notify the base station that the mobile station is ready to receive messages. The mobile station is conditioned to repeat this sequence of operations until it is set by the user into another mode. The controller is adapted to cause other selected circuits, not deactivated, to operate at reduced levels of power consumption to further increase battery life. The predetermined period of time may be adjusted to even further increase battery life.

In accordance with the present invention, a method for saving battery power in a cellular radio communication system having a base station with a base station control signal, by transmitting a first signal from a mobile station to the base station indicating that the mobile station is unable to receive messages from the base station, deactivating selected circuits within the mobile station for a predetermined period of time, automatically reactivating said selected circuits within the mobile station after said predetermined time period, transmitting a second signal from the mobile station to the base station indicating that the mobile station is able to receive messages.

These and other features and advantages of the present invention will be readily apparent to one of ordinary skill in the art from the following written description when read in conjunction with the drawings in which like reference numerals refer to like elements.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic illustration of two interconnectable cellular systems;

Figure 2A is a flowchart illustrating how SMS messages are entered into the cellular system;

Figure 2B is a flowchart illustrating how SMS messages are delivered a mobile station;

Figure 3 is a partial schematic block diagram of a mobile station illustrating those elements relevant to the present invention;

Figure 4A is a schematic illustration of the uplink and downlink DCC;

Figure 4B is a schematic illustration of the downlink DCC frame structure;

Figure 5 is a flowchart illustrating the method used by the mobile station to monitor the DCC;

Figure 6A is a flowchart illustrating the method used to place the mobile station into a pager-only mode;

Figure 6B is an illustration of an exemplary cellular radiotelephone showing the keys required to place the mobile station into the pager-only mode;

Figure 7 is a flowchart illustrating the operation of the mobile station operating in a pager-only mode;

Figure 8 is a timing diagram illustrating the operation of the mobile station operating in a pager-only mode.

DESCRIPTION OF THE INVENTION

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, circuit components, techniques, etc. in order to provide a thorough understanding of the invention. However it will be apparent to one of ordinary skill in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, and circuits are omitted so as not to obscure the description of the present invention with unnecessary detail.

System Operation

Referring initially to Figure 1, a typical cellular network 100 is illustrated showing the interconnection of two regional systems 101A and 101B. The system components shown are exemplary and as is obvious to one of ordinary skill in the art not all cellular systems will be limited to, or inclusive of, these components; other arrangements are possible as well. Regional system 101A comprises, for example, a mobile telephone switching office (MTSO) 107 connected to a plurality of base stations 110 each by communications link 113. Base station 110 provides the radio link 114 to each mobile station 109. Landline telephone user 103 and data users 102 are connected to the public telephone switched network (PSTN) 105 by communications link 115. The PSTN is, in turn, connected to the MTSO 107 by communications link 116. MTSO 107 is also connected to a visiting/home location register (VLR/HLR) 106 and to message center 104. Interconnection between networks 101A and 101B are effected between MTSOs 107 via an IS-41 communications link, in

this case microwave link 108 using microwave antennas 108A and 108B, or alternately through the long-distance PSTN lines 117. As shown, communication connections may be established between landline telephone user 103 or data users 102 and mobile stations 109. When the complete connection occurs within the boundaries 101A or 101B mobile station 109 is said to be in its "home" system. If a connection occurs across systems 101A and 101B mobile station 109 is said to be "roaming." The terms "home system" and "roaming" are well-known to one of ordinary skill in the art.

As shown in Figure 1 connections may occur between mobile stations 109 in the same system or mobile stations in different systems. Similarly, a communications connection may occur between a landline telephone user 103 or data user 102 and a mobile station 109. It may further be stated that mobile station 109 may be a cellular radiotelephone, a radio modem, or a personal digital assistant (PDA.)

The typical operation of the SMS procedure is described by the flowchart of Figure 2A. In one instance, for example, a landline telephone user, or caller, 103 attempts to place a call through the PSTN 105 and the MTSO 107 to mobile station 109 as indicated in block 201. If mobile station 109 answers (i.e., responds to the page broadcast from one of the base stations 110) then the connection is made according to known methods as indicated by block 203. Alternatively, if mobile station 109 does not answer then the caller 103 is routed through the MTSO 107 to the message center 104 as indicated in block 204.

There are several ways in which a message in block 206 may be received by the message center 104. The prompt in block 205 may, in one instance, be a human operator who answers the call and enters the message through a computer or console into message center 104. In another instance, the user 103 is prompted as indicated in block 205 to enter the message via the telephone keypad in a manner similar to the known procedures used to leave a message to be transmitted to a broadcast paging

receiver. In yet another instance, the user may directly transfer the message from a personal digital assistant, or a personal computer 102 in this case the prompt in block 205 is a computer tone similar to a fax machine's set-up signaling. Regardless of the method used, a brief alphanumeric message is stored in message center 104 for later transmission to mobile station 109.

A description of how the stored message is forwarded to mobile station 109 is shown by the flowchart of Figure 2B. When the mobile station is first powered-on, or otherwise wishes to make contact with the system as will be described in more detail hereinafter, mobile station 109 performs a registration with the system according to Section 6.3.7 of Specification PN 3011-1 as indicated in block 209. Based on information contained within mobile station's registration signal, system 101A, for example, determines if mobile station 109 is in its home system 101A or if it is roaming in system 101B as indicated in block 210. If the mobile station is in home system 101A, the SMS message stored in the message center 104 is broadcast as indicated in block 214 to mobile station 109 via the DCC protocols to be described. If, alternately, mobile station 109 is roaming in, for example, system 101B a registration message is sent to mobile station's 109 home system 101A via the IS-41 link 108 as indicated in block 212. Upon receipt of the registration message, the home system 101A message center 104 transfers the SMS message previously stored to roaming system 101B via the IS-41 link 108 as indicated in block 213. If no SMS messages are stored an indication thereof is alternately communicated. Once received, the SMS messages are broadcast via base station 110 to mobile station 109 according to the DCC specification.

Description of the DCC

A complete and thorough description of the DCC is provided in specifications PN 3011-1 and PN 3011-2 previously

incorporated by reference. In the following, a summary description of the DCC is provided as necessary to make clear the operation of the present invention.

The DCC 420 comprises the logical channels shown in Figure 4A which is adapted from Figure 2-3 of Specification 3011-1. Uplink channel 414 transmitted from mobile station 109 to base station 110 consists of the random access channel (RACH) 413. Downlink channel 415 transmitted from base station 110 to mobile station 109 consists of the broadcast control channel (BCCH) 416 and the short message, paging, and access control channel (SPACH) 407.

In Figure 4B is shown the frame structure of the Downlink DCC 415 as specified in specification PN 3011-1. To ensure compatibility with existing equipment, the DCC makes use of the present IS-54B TDMA frame structure. A TDMA frame 400 is defined as three contiguous time slots 401, 402, and 403. As specified in IS-54B, mobile station 109 will receive signals broadcast from base station 110 on every specified third slot, for example, mobile station 109 may continuously monitor slot 1 401 and slot 4 401A, slot 2 402 and slot 5 402A, or alternately slot 3 403 and slot 6 403A. Therefore during each TDMA frame 400 the mobile station receiver 303 (Figure 3) to be described in more detail hereinafter need only be on 1/3 of the time.

A DCC superframe 408 is defined as a number of sequential TDMA frames 400. In the example shown in Figure 4B, the DCC superframe 408 comprises information transmitted sequentially on every third slot of an IS-54B frame. Within the DCC superframe 408 are contained different information slots. The FBCCH 404, EBCCH, 405 and the SBCCH 406 are broadcast control channels which transmit global information for all mobile stations. FBCCH 404, EBCCH 405, and SBCCH 406 may extend over several slots as indicated by the dots in adjacent slots of the DCC superframe 408. The FBCCH 404, EBCCH 405, and the SBCCH 406 are described in more detail in Section 2.3.2 of PN 3011-1.

Slot 407 contains information directed at specific mobile stations 109 comprising the paging control channel (PCH) 410, access control channel (ARCH) 411, and the short message service control channel (SMSCH) 412.

Two DCC superframes 408 are arranged sequentially into a primary and secondary superframe which together are known as a hyperframe 409. SMS messages may be interleaved in the SPACH slot 407 across several hyperframes.

Mobile Station Operation

Normal monitoring of the DCC downlink 415 by mobile station 109 involves checking, for example, each SPACH slot 407 on the DCC superframe 408 as shown in Figure 4B. In order to monitor each slot, the mobile station executes the sequence of operations shown by the flowchart of Figure 5. Mobile station 109 first "powers-up" as indicated in block 501. Powering up may be effected by the user turning mobile station 109 on from being completely off, or it may be waking up from what is referred to as a "deep sleep state" as will be described in more detail hereinafter. After powering up, mobile station 109 scans, according to known methods, a predetermined set of DCC downlink channels 415 and locks its receiver to one of the DCCs 415 as indicated in block 502. Once locked to a DCC 415, mobile station 109 receives and decodes DCC hyperframe 409 as indicated in block 503. In the FBCCH slot 404 is contained information identifying the SPACH paging slot and the paging class mark, to be described in more detail hereinafter, to be used by mobile station 109. As indicated by block 504, mobile station 109 transmits via RACH 414 a "power-up" registration to the base station 110 and receives via the downlink DCC 415 an acknowledgment back from base station 110. The acknowledgment may contain additional information instructing mobile station 109 to monitor another DCC 420 or to otherwise override the FBCCH information. Assuming that an acknowledgment and no

instructions are received from base station 110, mobile station 109 assumes in block 505 the paging class corresponding to the paging class mark in FBCCH slot 404 received in block 503. Paging class marks are described in greater detail in section 4.5.5 of specification PN 3011-1.

There are 8 paging classes designated 1-8 which specify the frequency with which mobile station 109 listens to SPACH slot 407 for a SMS message as indicated in block 506. A first mobile station 109 assigned to paging class 1 monitors one SPACH slot 407 for each hyperframe 409, a second mobile station 109 assigned to paging class 2 monitors one SPACH slot 407 for every other hyperframe 409, a third mobile station 109 assigned to paging class 3 monitors one SPACH slot 407 for every third hyperframe 409, and so on. In paging class 8, for example, mobile station 109 may only monitor a SPACH slot 407 every 2 minutes for SMS messages. This procedure allows the system operator to assign so called sleep-modes. This procedure is known and described in greater detail in specifications PN 3011-1 and PN 3011-2.

Referring now to Figure 3, a partial functional block diagram of a mobile station 109 is shown. During SPACH slot 407, power must be applied to receiver 303, demodulator 302, controller 304, timing generator 305, and the timebase/automatic frequency control (AFC) 306. The timebase 306 may be a temperature controlled crystal oscillator (TCXO). In between SPACH slots 407 however, all that is required to be activated is timing generator 305 and the timebase/AFC 306 to keep track of when the next SPACH slot 407 is to occur. However, if the next SPACH slot 407 is to be decoded correctly, as is obvious to one of ordinary skill in the art, the timing accuracy must be accurate to within a couple of symbol periods. This requires timing generator 305 and the timebase/AFC 306 to operate in a precise manner wherein power must also be applied to the controller 304 to control operation of timing generator 305 and AFC 306. During the intervals between SPACH slots 407 timing

generator 305 and controller 304 may operate at a greatly reduced instruction rate and therefore have reduced current requirements. However, in order to maintain the timing accuracy required the timebase/AFC 306 must remain fully active between SPACH slots 407. The necessity of maintaining the timebase/AFC 306 fully active places a lower limit on the amount of current drawn from battery 310 and hence limits the absolute battery life.

Operation of the Page Only Mode

When a user of mobile station 109 wishes to place calls but not to receive incoming calls the user may simply turn the phone off until such time as the user decides to place a call. By so doing the user may maximize the life of battery 310 since little or no current is drawn by the circuits shown in Figure 3 when mobile station 109 is deactivated. However, if the mobile station 109 is deactivated mobile station 109 is not able to receive incoming SMS messages.

If, alternately, the user of mobile station 109 wishes to place calls and to also receive SMS messages while at the same time maximizing battery life, the user of mobile station 109 may select to place the phone into what is referred to as the "pager-only mode." One method by which the user may place mobile station 109 into a pager-only mode is described in Figure 6A. It will be understood by those of ordinary skill in the art that there are many ways for the user to establish/select a pager-only function in a cellular telephone. The example given in Figures 6A and 6B are therefore exemplary only and are not meant to be limitative. First, as indicated in block 601, the mobile station 109 is be turned on in the normal manner. Then as shown in Figure 6B, the user then sequentially presses function key 607, the '1' key 608, and finally the '5' key 609 on the keypad of mobile station 109 as indicated in blocks 602 - 603. Executing this sequence will toggle the mobile station into the

pager-only mode. Repeating the sequence will reset the mobile station into the normal stand-by mode where mobile station 109 monitors the DCC according to its assigned paging class. Another method for placing mobile station 109 into a pager-only mode requires the user to enter a menu mode and, using the arrow keys 610 commonly found on mobile stations, the user can sequence through the available options to select or deselect the pager-only mode. To confirm that mobile station 109 is in the pager-only mode a brief indication will be shown on display 606 of the mobile station 109 as indicated in block 604. After a brief period, display 606 will go blank until such time as a SMS message is received.

Referring now to Figure 7, the operation of mobile station 109 in the pager-only mode is described. Once mobile station 109 has entered the pager-only mode as indicated in block 701 all circuits non-essential to the operation of the mobile station 109 while in the pager-only mode are de-activated as will be described. This is referred to as the "deep-sleep" state. Referring back to Figure 3, in the deep sleep state analog decode 301, demodulator 302, receiver 303, analog encode 307, modulator 308, and transmitter 309, are deactivated. Time base/AFC 306 is kept running, but at a significantly reduced level since its accuracy can be allowed to drift substantially. Timing generator 305 must also be kept activated but at an extremely low level of activity only sufficient to count the number of oscillations generated by the timebase/AFC 306. In this state, the current requirements of mobile station 109 are extremely low and hence the current drain from the battery 310 is greatly reduced.

After a predetermined period of time (e.g., 10 minutes), or equivalently a predetermined number of oscillations, timing generator 305 alerts controller 304 to "wake-up" and reactivate the receiver 303, the demodulator 302, and to increase the activity and hence the accuracy of the timebase/AFC 306. It is obvious to one of ordinary skill in the art that the

predetermined period of time may be adjusted either by the user or at the time of manufacture. Controller 304 and the timing generator 305 also increase their activity level sufficient to perform the functions necessary to monitor the DCC 415. This sequence of operations is termed "waking-up" as indicated in block 702. Again similar to Figure 5, the mobile station begins to scan the DCC 415 and locks its receiver 303 to one of the DCC superframes 408 as indicated in block 703. As indicated in block 704, mobile station 109 transmits via the RACH 413 a power-up registration message to base station 110 to alert, via MTSO 107, message center 104 that mobile station 109 is active and prepared to receive SMS messages. Mobile station 109 begins to monitor the SPACH slot, pursuant to its paging class as previously described, for SMS messages as indicated in block 705. If, as shown in block 706, it is indicated via the SPACH 407 that there are no SMS messages waiting to be transmitted from base station 110 and received by mobile station 109, mobile station 109 transmits via the RACH 413 a power off, or power-down, registration as indicated in block 707. Power-up, or power-on, and power-off, or power-down registration messages are transmitted from mobile station 109 to base station 110 over the uplink DCC 414, or RACH 413, as described in greater detail in specification PN 3011-1. The message format is identical except for the bit field which indicates whether the registration message is a power-up, or power-down registration. Once the transmission is complete, the mobile station 109 automatically re-enters the deep-sleep state and de-activates all non-essential circuits as previously described and indicated in block 708. Mobile station 109 remains in the deep-sleep state until again a predetermined time period has elapsed (i.e., 10 minutes) at which time the cycle is repeated. This continues until the user resets the pager-only mode as described above.

If, alternatively, at block 706 the mobile station receives an SMS message from base station 110, it assumes the paging class set by the FBCCH 404 and continuously monitors the

DCC 415 until the complete SMS message is received as indicated in block 711. The SMS message is transmitted from base station 110 to mobile station 109 over sequential occurrences of the SPACH 407 according to known DCC protocols. As the message is received it is stored electronically within mobile station 109 for subsequent retrieval by the user. In block 712 mobile station 109 alerts the user via a visual, audible, or mechanical (e.g. vibration) that a SMS message has been received. At this point the user may elect to read the SMS message. After issuing the alert, and regardless of whether or not the user has reviewed the messages, the mobile station re-enters the sleep-mode via block 707 as previously described.

In Figure 8 is shown the power savings advantage afforded by the present invention. Note that power savings refers equivalently to the reduction of electrical current drawn from battery 310. Referring to Figure 8 the relative current consumption of the mobile station 109, a measure of power consumption and hence relative battery life, is displayed on the ordinate axis 810. Time is displayed on the abscissa 811. Read in conjunction with the flowchart of Figure 7 the significance of the graph of Figure 8 will be described. After "waking-up" in block 702, mobile station 109 begins to scan control channels as indicated in section 802 of the graph. During channel scan, a moderate amount of current is required as indicated by I_{scan} 807 on the ordinate. Once the receiver 303 locks on to a control channel 415 as indicated in block 703, the mobile station 109 transmits a power-up registration as indicated in block 704. During the transmission phase 803 mobile station 109 draws the greatest amount of current from battery 310 as indicated by $I_{transmit}$ 806. After transmitting the power-up registration, mobile station 109 periodically scans in section 804 the SPACH 407 to see if any SMS messages as indicated in block 705 are present. Due to the periodic monitoring of the SPACH 407 the current requirements $I_{receive}$ 808 are lower than when the receiver 303 continuously scans the control channels as in section 802. After

reception of, if any, the SMS messages mobile station 109 transmits a power-down registration as in block 707. Again since mobile station 109 is transmitting in section 805, the power requirements I_{transmit} 806 are high. After transmitting the power-off registration, the mobile station enters its deep-sleep state as in block 708. During this interval 801 only the minimal essential circuits are energized and power and current consumption I_{idle} 809 is greatly reduced. Mobile station 109 remains in this state for a predetermined duration T_{idle} and then the process repeats at block 702. For this cyclical operation, the average current consumption can be calculated as follows:

$$I_{\text{average}} = \left[\frac{(I_{\text{scan}} * T_{\text{scan}}) + 2(I_{\text{transmit}} * T_{\text{transmit}}) + (I_{\text{receive}} * T_{\text{receive}}) + (I_{\text{idle}} * T_{\text{idle}})}{(T_{\text{scan}} + 2T_{\text{transmit}} + T_{\text{receive}} + T_{\text{idle}})} \right] \quad \text{Equation 1}$$

Using Equation 1, the average current drawn from battery 310, I_{average} , of the present invention can be compared to the average current drawn from battery 310 while continuously monitoring the DCC 415 as is done presently. For typical mobile stations, the average current drawn from battery 310 while continuously monitoring the DCC 415 has been found to be approximately 15 milliamperes. With a 500 milliamper-hour battery this gives a stand-by time of approximately 33 hours.

Typical values for the variables in equation 1 are given below in Table 1:

Operation	Current Variable	Power Consumption (milliamperes)	Time Variable	Time (seconds)
Transmit	I_{transmit}	600	T_{transmit}	100ms
DCC Scan	I_{scan}	200	T_{scan}	2s
Receive SMS	I_{receive}	15	T_{receive}	5s
Sleep	I_{sleep}	3	T_{sleep}	600s

Table 1

Applying these values to Equation 1 yields an average current, $I_{average}$, of 3.95 milliamperes. Therefore a mobile station incorporating the present invention equipped with the same 500 milliampere-hour battery provides a battery life of approximately 128 hours. This is a significant improvement over the prior-art and represents a distinct advantage to the user of a digital radiotelephone who wishes to make, but at times not to receive, calls and to utilize the SMS feature available under the DCC 415. As is obvious to one of ordinary skill in the art, significantly longer battery lives will be available by increasing the idle time above the 10 minutes used in the above example.

The user enjoys the benefit of longer battery life until such time as the user takes affirmative action to exit the pager-only mode, for example, by repeating the steps shown in Figure 6A. Of course, a phone call may be made at any time during which the pager-only mode is temporarily suspended for the length of the call.

While the present invention has been described with respect to a particular digital cellular communications system, those skilled in the art will recognize that the present invention is also applicable to other communications systems and that therefore the present invention is not limited to the specific embodiments described and illustrated herein. Different embodiments and adaptations besides those shown and described as well as many variations, modifications and equivalent arrangements will now be reasonably suggested by the foregoing specification and drawings without departing from the substance or scope of the invention. While the present invention has been described herein in detail in relation to its preferred embodiments, it is to be understood that this disclosure is only illustrative and exemplary of the present invention and is merely for the purposes of providing a full and enabling disclosure of the invention. Accordingly, it is intended that

the invention be limited only by the spirit and scope of the claims appended hereto.

What is claimed is:

1. A method for saving battery power in a cellular radio communication system having a base station with a base station control signal, comprising the steps of:

(a) transmitting a first signal from a mobile station to the base station indicating that the mobile station is unable to receive messages from the base station;

(b) deactivating selected circuits within the mobile station for a predetermined period of time;

(c) automatically reactivating said selected circuits within the mobile station after said predetermined time period;

(d) transmitting a second signal from the mobile station to the base station indicating that the mobile station is able to receive messages; and

(e) repeating steps (a) through (d).

2. The method of claim 1, wherein said messages comprise alphanumeric data.

3. The method of claim 1, wherein said mobile station is a battery-powered cellular radiotelephone.

4. The method of claim 1, wherein said predetermined period of time is determined by the mobile station.

5. The method of claim 1, wherein said first signal includes a power-down registration message.

6. The method of claim 1 wherein said second signal includes a power-up registration message.
7. A method for saving battery power in a cellular radio communication system having a base station with a base station control signal, comprising the steps of:
 - (a) transmitting a first signal from a mobile station to the base station indicating that the mobile station is unable to receive messages from the base station;
 - (b) deactivating selected circuits within the mobile station for a predetermined period of time;
 - (d) automatically reactivating said selected circuits within the mobile station after said predetermined period;
 - (e) receiving said base station control signal and transmitting from the mobile station to the base station a second signal indicating that the mobile station is able to receive said messages where said base station control signal is divided into a plurality of time slots ; and
 - (f) repeating steps (a) through (e).
8. The method of claim 7, wherein said messages comprise alphanumeric data.
9. The method of claim 7, wherein said mobile station is a battery-powered cellular radiotelephone.
10. The method of claim 7, wherein said predetermined period of time is determined by the mobile station.
11. The method of claim 7, wherein said first signal includes a power-down registration message.

12. The method of claim 7, wherein said second signal includes a power-up registration message.

13. A method for saving battery power in a cellular radio communication system having a base station with a base station control signal, comprising the steps of:

- (a) placing a mobile station into a page only mode;
- (b) transmitting a first signal from the mobile station to the base station indicating that the mobile station is unable to receive messages from the base station;
- (c) deactivating selected circuits within the mobile station for a predetermined period of time;
- (d) automatically reactivating said selected circuits within the mobile station after said predetermined time period;
- (e) receiving by the mobile station the base station control signal and transmitting from the mobile station a second signal indicating that the mobile station is able to receive said messages where the base station control signal is divided into a plurality of time slots;
- (f) transmitting from the base station said messages on a set of said plurality of time slots of the base station control signal;
- (g) monitoring by the mobile station said messages on said set of said plurality of time slots of the base station control signal; and
- (h) repeating steps (b) through (g) until said mobile station is reset from said page only mode.

14. The method of claim 13, wherein said messages comprise alphanumeric data.

15. The method of claim 13, wherein said mobile station is a battery-powered cellular radiotelephone.


16. The method of claim 13, wherein said page only mode reduces the average current drain said battery.

17. The method of claim 13, wherein said predetermined period of time is determined by the mobile station.

18. The method of claim 13, wherein said first signal includes a power-down registration message.

19. The method of claim 13, wherein said second signal includes a power-up registration message.

Figure 1

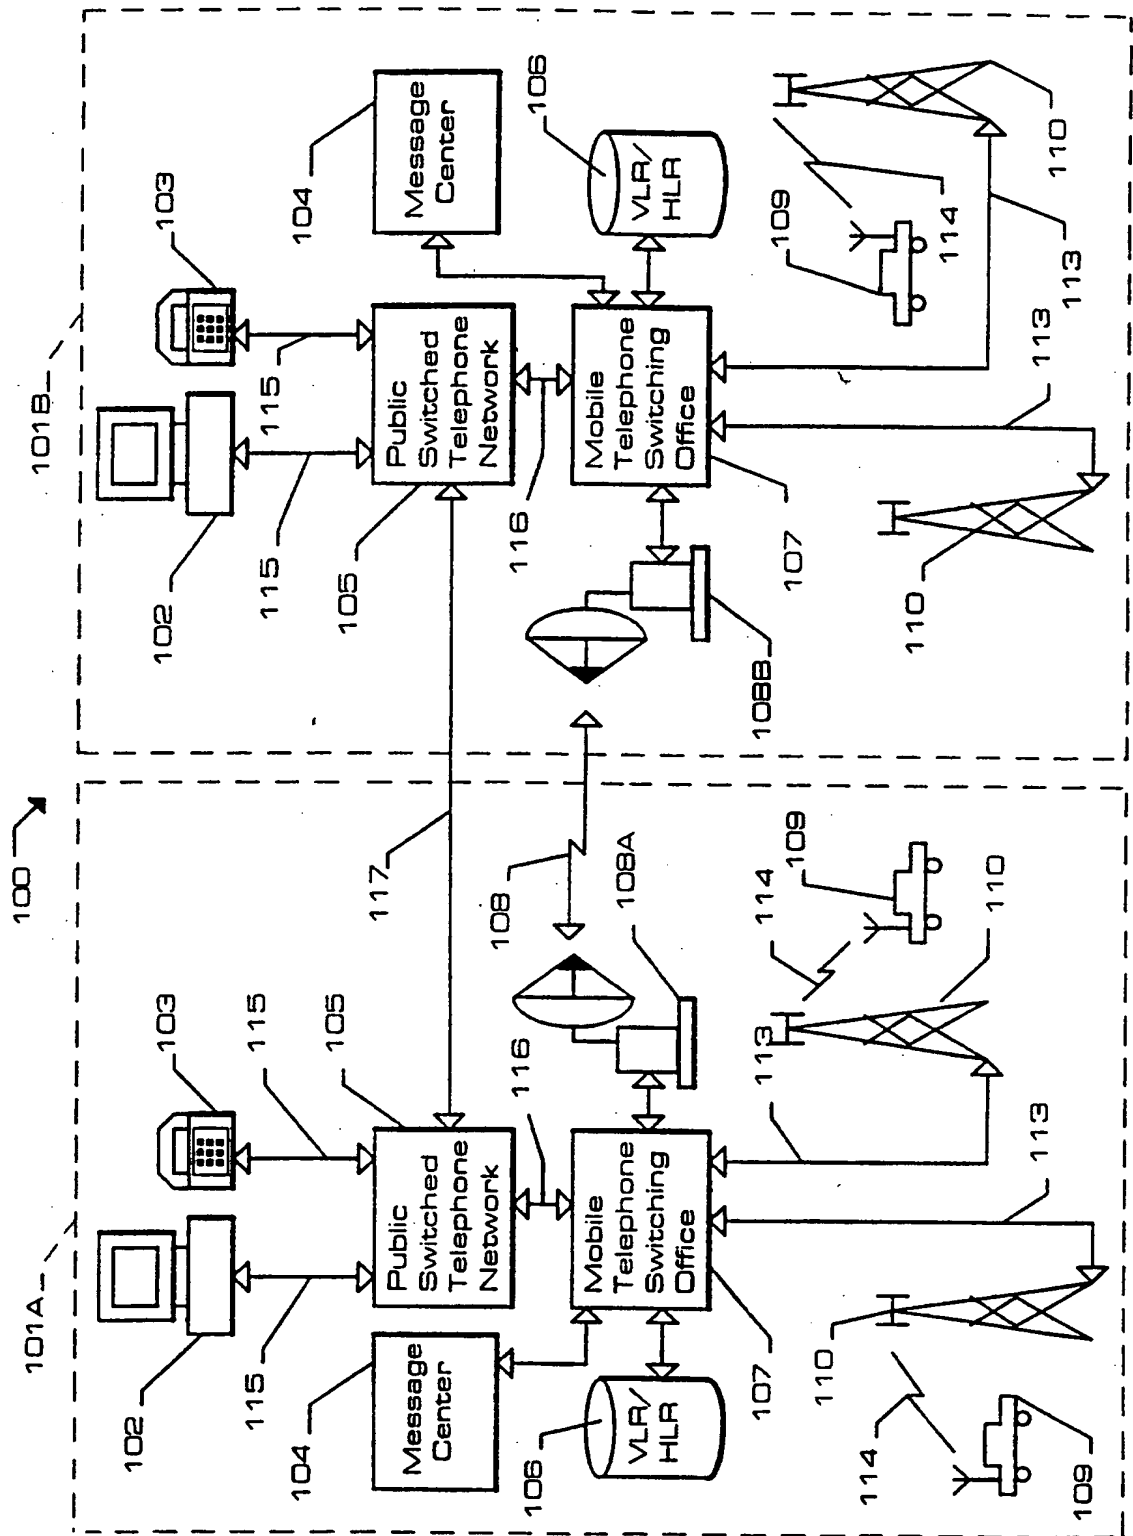

20. A cellular radio communications sytem with extended battery life, comprising:

a mobile station conditionable to transmit a first signal to a base station to notify the base station that said mobile station is unable to receive messages;

a controller to deactivate selected circuits within said mobile station, when conditioned, for a predetermined time period to conserve battery power and to reactivate said selected circuits after said predetermined time period to cause said conditioned mobile station to transmit a second signal to the base station to notify the base station that the mobile station is able to receive messages, said conditioned mobile station transmitting another first signal after receiving any messages, said controller deactivating and reactivating said selected circuits and said conditioned mobile station transmitting another second signal after receiving any messages, repetitively until, said mobile station is placed in a different mode.

21. The system of claim 20, wherein said controller causes other selected circuits to operate at a reduced level of activity during said predetermined time period.

22. The system of claim 20, wherein said predetermined period of time is adjustable.

3/9

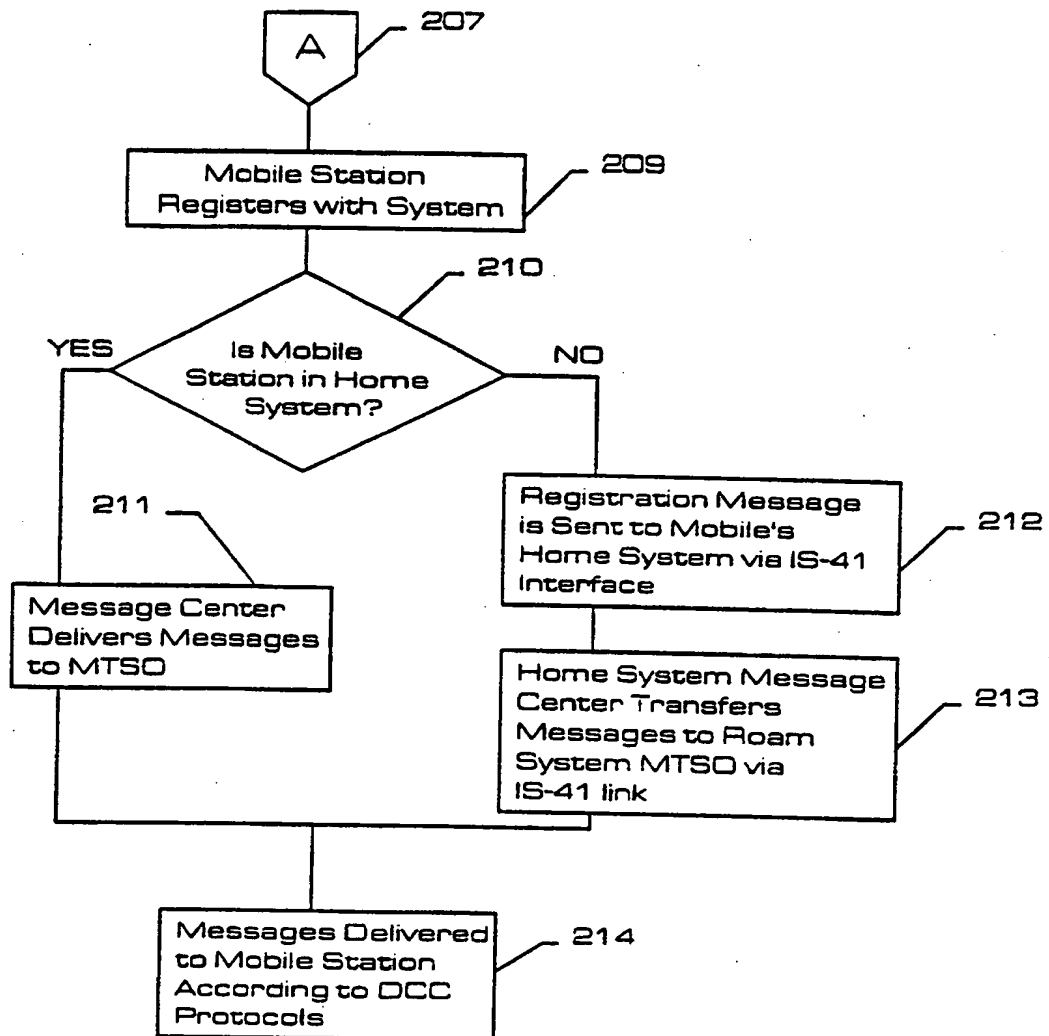


Figure 2B

2/9

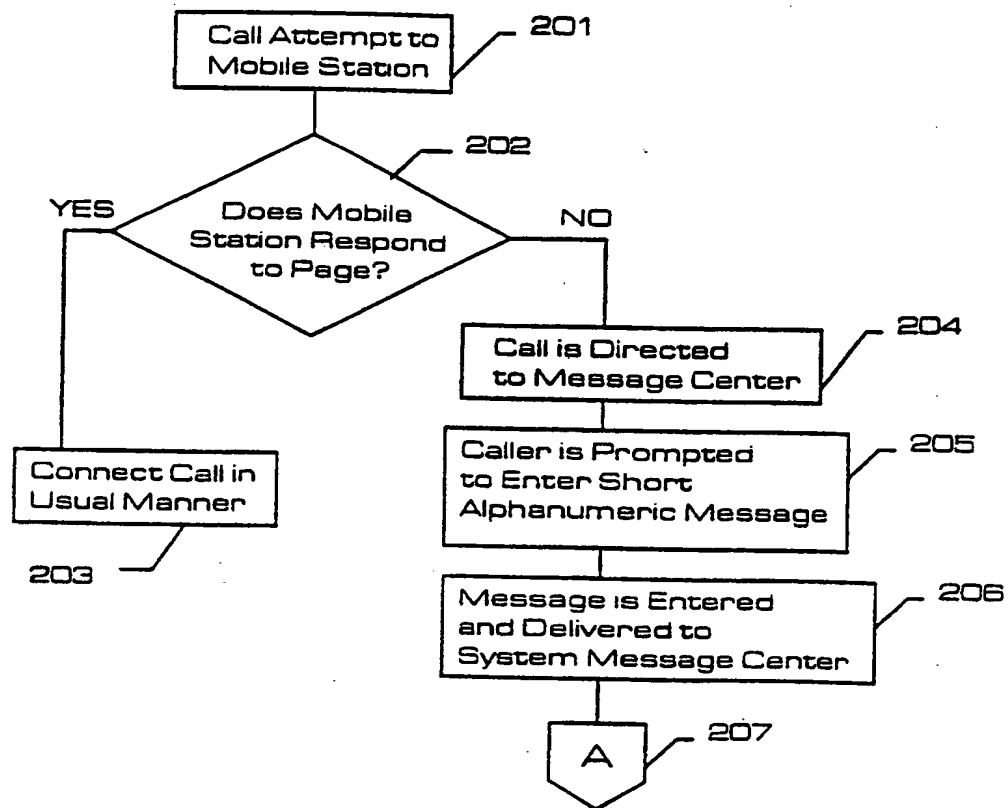


Figure 2A

5/9

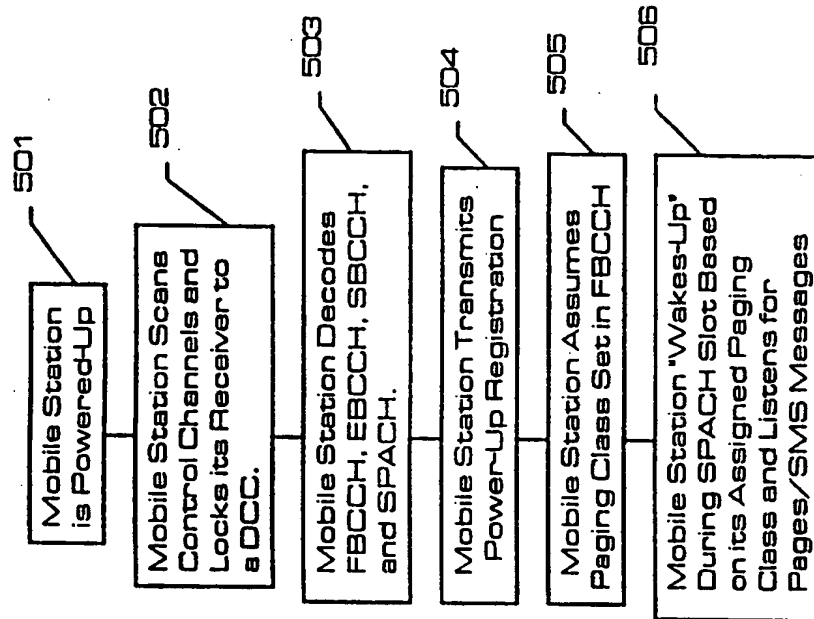
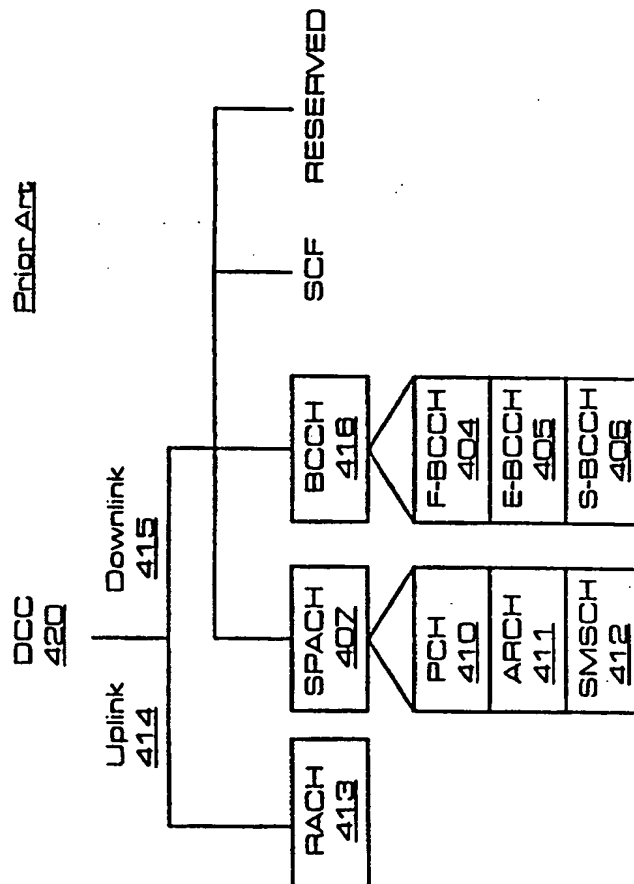


Figure 5



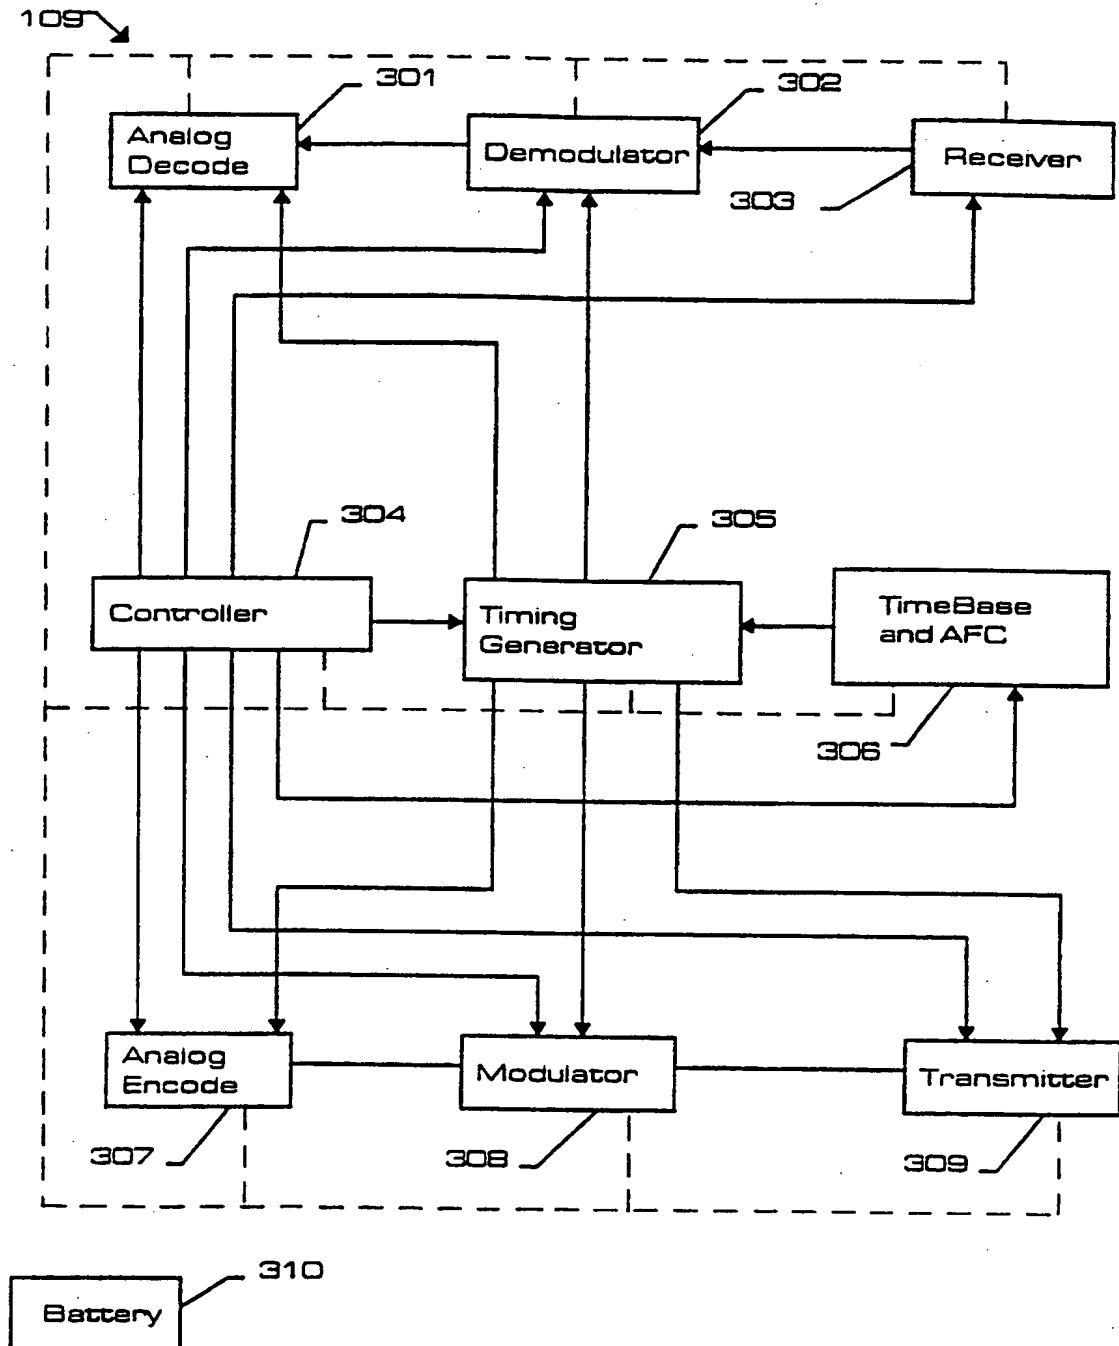


Figure 3

7/9

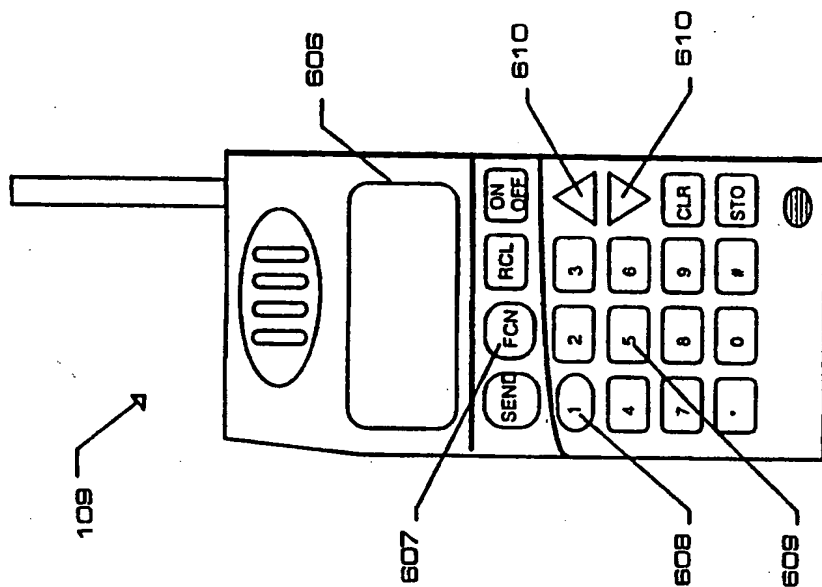


Figure 6B

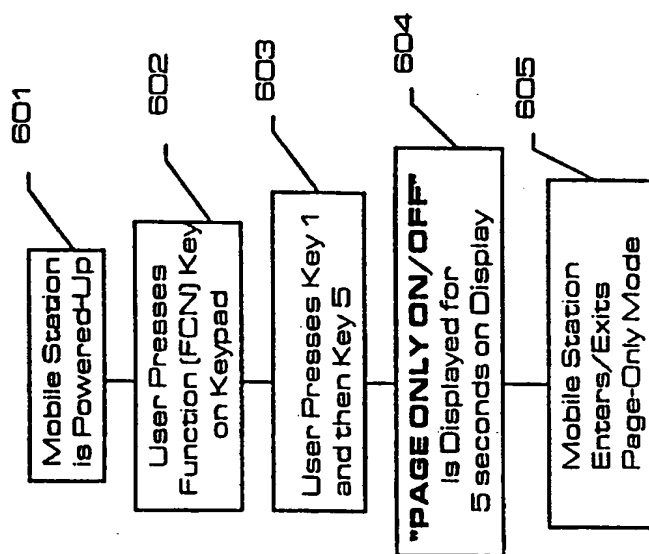


Figure 6A

6/9

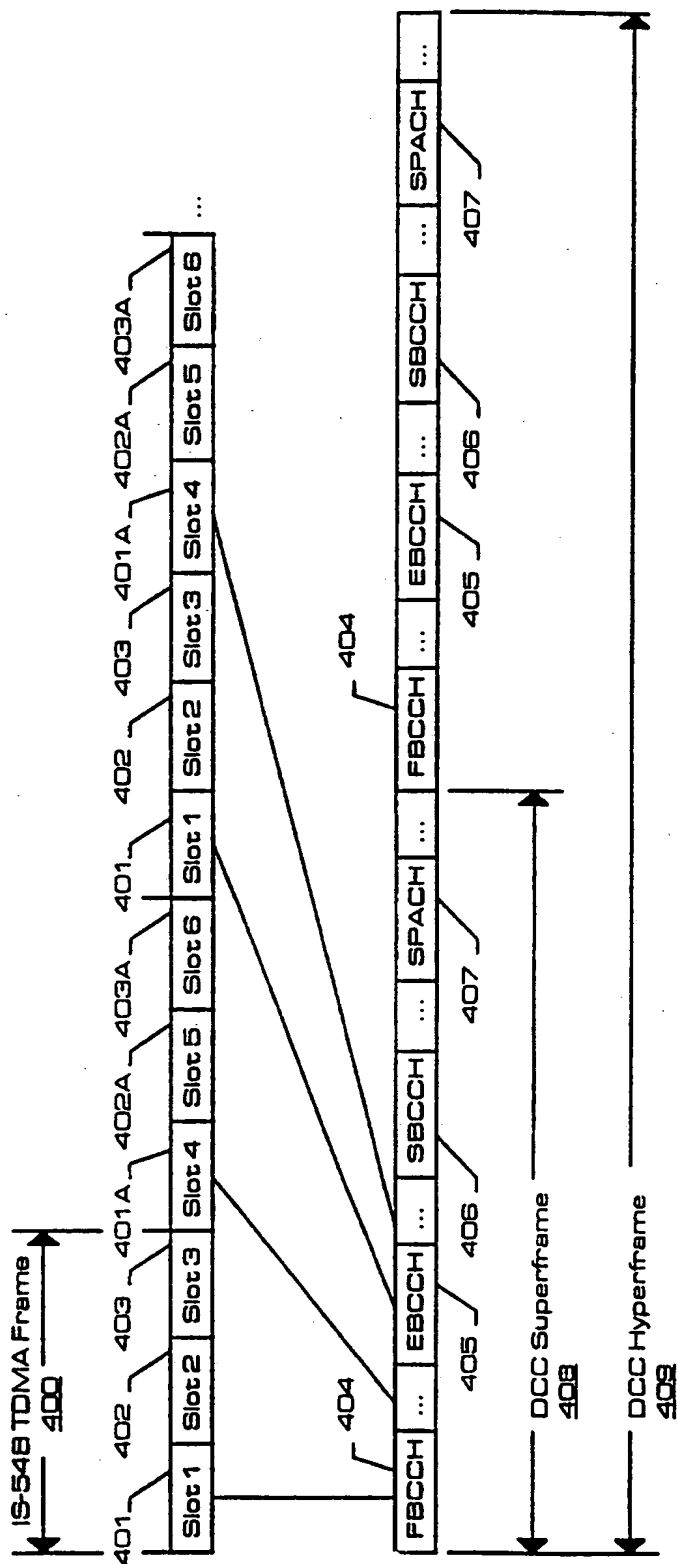


Figure 4B

8/9

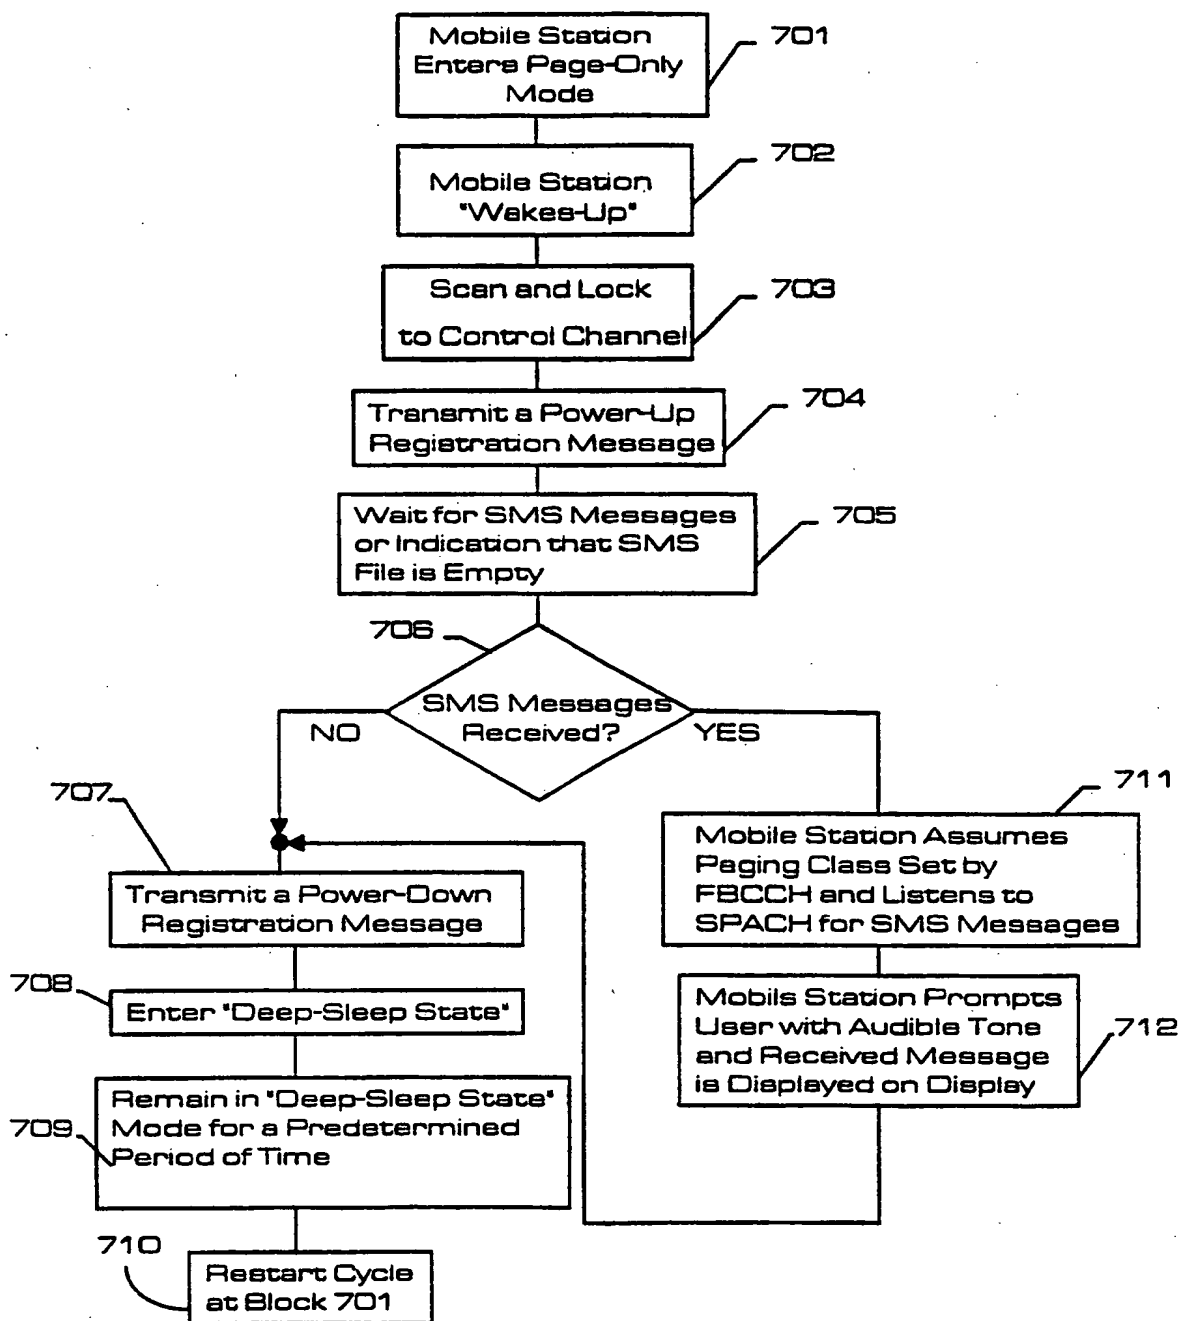


Figure 7

9/9

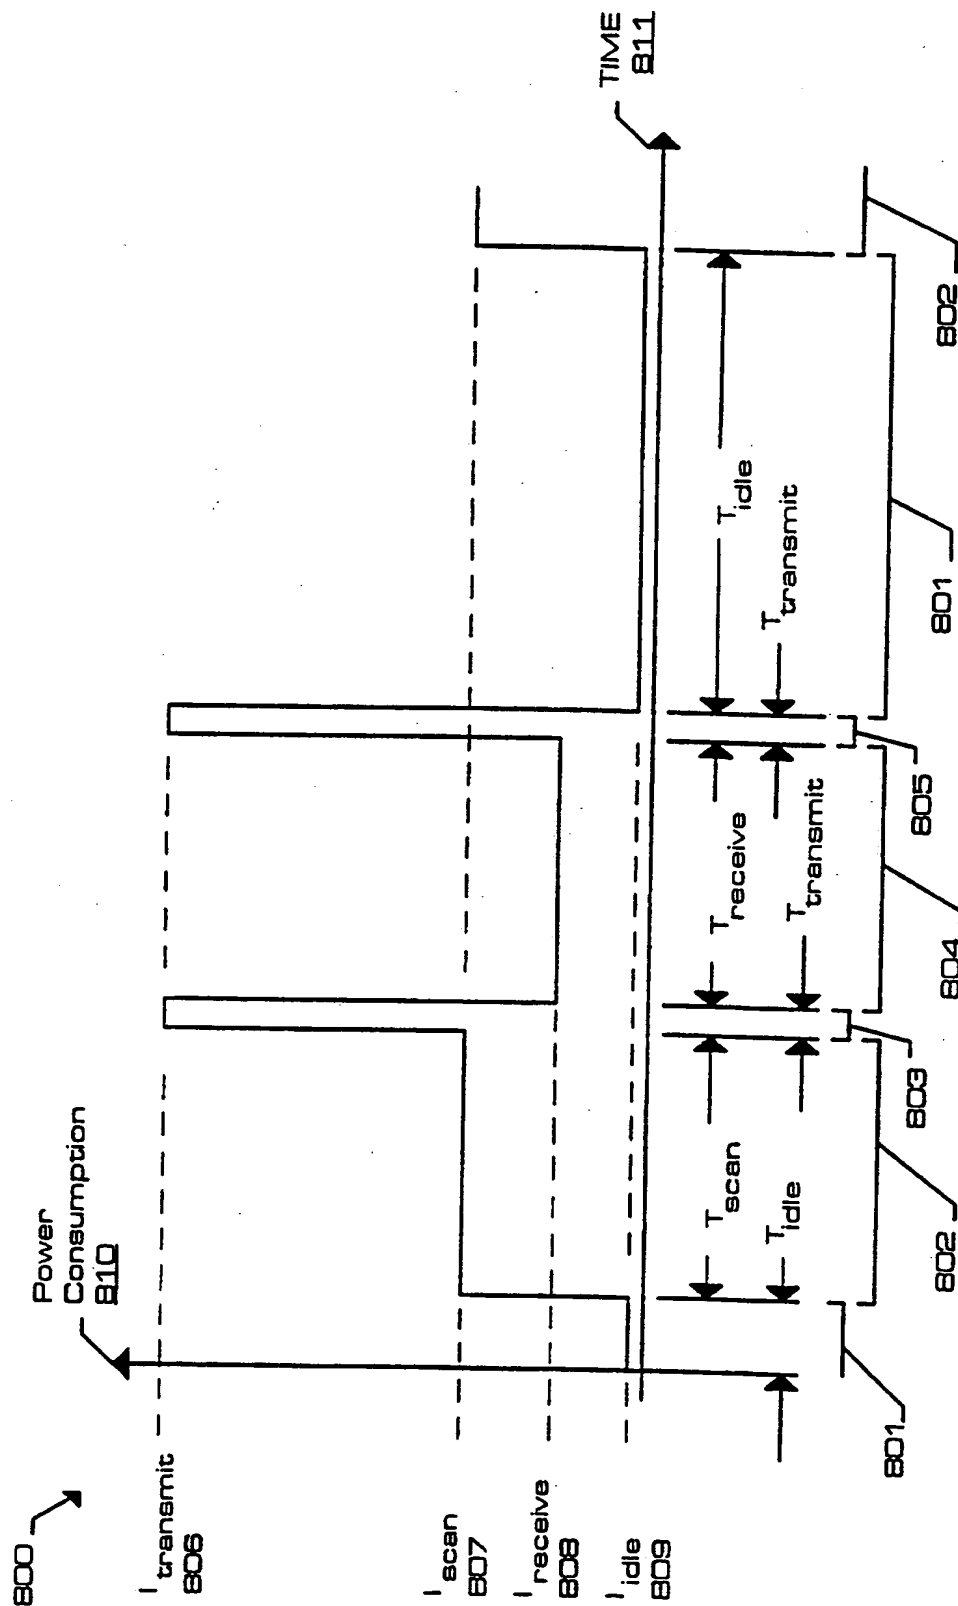


Figure 8

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/US 95/03410

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/32 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	GB-A-2 244 409 (TELECOM SECURICOR CELLULAR RADIO LIMITED) 27 November 1991 see page 2, line 34 - page 3, line 3 see page 3, line 11 - line 14 see page 6, line 15 - page 7, line 17 see figure 3B ---	1-12, 20, 22 13-15, 17-19
A	EP, A, 0 514 360 (TELEFONAKTIEBOLAGET L M ERICSSON) 19 November 1992 see column 2, line 56 - column 6, line 56 see column 8, line 31 - line 42 see column 9, line 39 - line 56 --- -/-	1-3, 5, 7-9, 11, 13-16, 18, 20, 21



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 July 1995

Date of mailing of the international search report

18. 07. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Behringer, L.V.

INTERNATIONAL SEARCH REPORT

International Application No
PC1/US 95/03410

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 448 789 (BOSCH GMBH ROBERT) 2 October 1991 see the whole document -----	1,7,13, 20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/03410

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2244409	27-11-91	NONE	
EP-A-0514360	19-11-92	JP-A- 6164487	10-06-94
EP-A-0448789	02-10-91	DE-A- 4009578	26-09-91

THIS PAGE BLANK (USPTO)